



www.thermofloor-agg.de



ABOUT US

THERMOFLOOR-AGG is a European manufacturer specializing in **HVAC**

Headquartered and operating from Kosovo, all products are developed and manufactured in accordance with EU quality standards, ensuring maximum durability, energy efficiency, and long-term operational reliability.

Supported by modern production technology, rigorous quality control procedures, and continuous product development, we serve wholesalers, construction companies, and large-scale residential and commercial projects across regional and international markets.

Our mission is to deliver dependable, high-performance system solutions at competitive wholesale pricing, while building long-term partnerships founded on trust, consistency, and technical excellence.

"Engineered for Performance. Built for Reliability."

PE-RT PIPE

Pipe with oxygen barrier

Pe-rt 16

Pe-rt 17


PERT -AL-PERT

Without Insulation

16,20,26,32

With Insulation

16,20,26,32

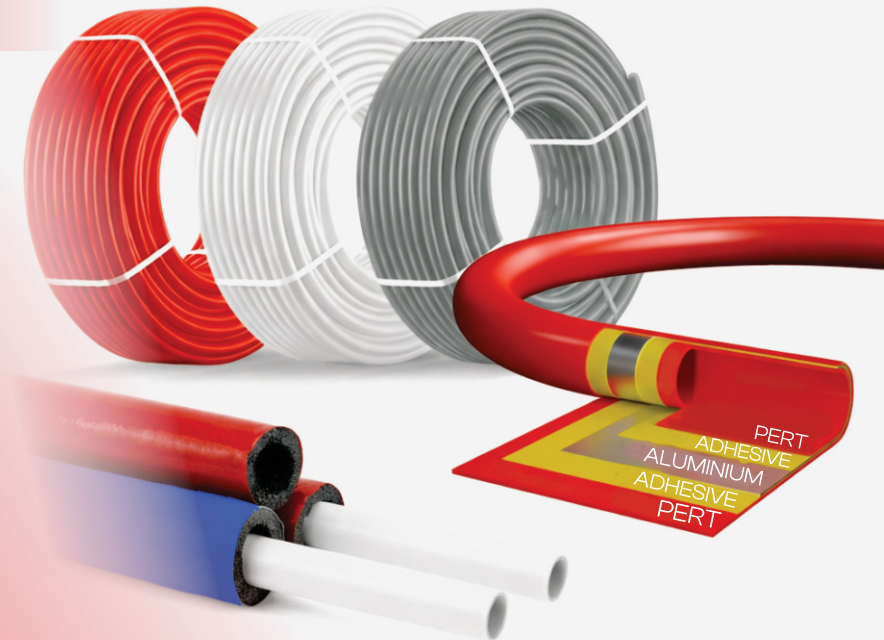

PS SHEET FOIL


Thickness
1mm

Height
1350mm

Length
750mm




Alu Foil

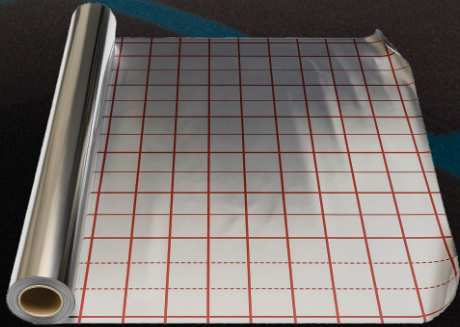

Length (m)
50

Thickness (micron)
105


Foil

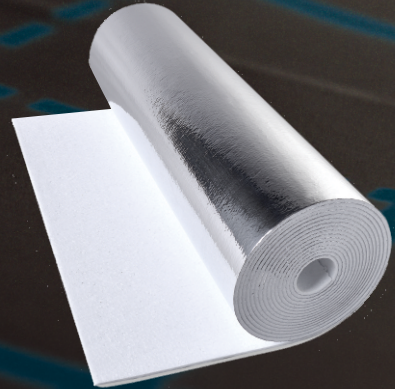

Length
50


Width (cm)
120

Eps Foil

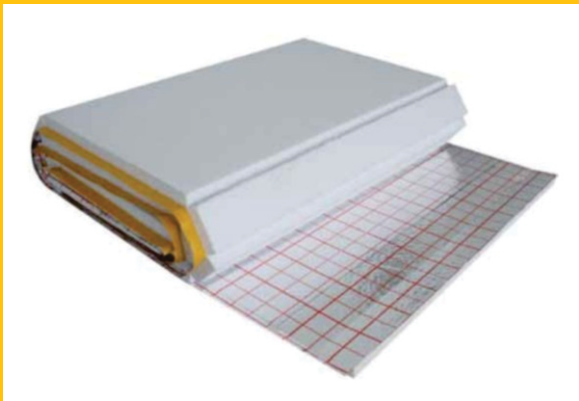

Characteristics	10	20	30	40	50
Vapur barrier	Foil 0.2mm				
Grid Dimensions (cm)	5		10		
Package unit	10m ² roll	2m ² sandwich	1m ² single		
Format	10x1m=10m ²	2x1m=2m ²	1x1m=1m ²		

Plastic pipe clip

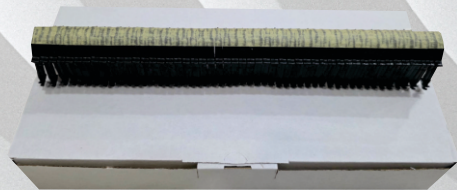

PCS per box
250 pcs

Length types
3 cm & 5 cm

Clip Rails



Length
1m

PCS per box
50 pcs

Bracket Elbow

PCS per box
100



Length (m)
10

Width (mm)
12

Height (mm)
0.75

Steel band



Sealing cord

Characteristics

1
2

Length

80m
160m

Pcs per package

30
25



Liquid Teflon

Characteristics

50ml
250ml




Room Thermostat



AC220V, 16A
Both Internal sensor and
external sensor (Cable Length: 3m)
Eu mounting



AC220V, 16A 45mm frame
Both Internal sensor and
external sensor (Cable Length: 3m)
Eu mounting



AC220V, 16A
Both Internal sensor and
external sensor (Cable Length: 3m)
Eu mounting

Room Thermostat



Power: 230VAC
Load Current: 3A
Accuracy: $\pm 1^{\circ}\text{C}$
Range: $10.0^{\circ}\text{C} \sim 30^{\circ}\text{C}$
Load Current: $<1\text{A}$
Shel: PC + ABS
Voltage: $220\text{VAC} \pm 10\%$, 50/60HZ
Size: $84 \times 84 \times 30\text{mm}$



Wired Non-programmable
boiler thermostat



Wireless Non-programmable
boiler thermostat



Wired Central Hub, 220V

Expansion Vessel



Capacity

24l 36l 50l 80l 100l

Type

Horizontal / Vertical



Bracket for Expansion

Type: 3/4 | 1"



Steel water distribution box



Dimensions

450 x 400
450 x 500
450 x 600
450 x 700
450 x 800
450 x 900
450 x 1000

Types

**Recessed
Manifold Cabinet**

**Floor-Standing
Manifold Cabinet**

Plastic Box for Manifolds

A/C BOX



Dimensions

350X350X90
500x350x90
650x350x90



Dimensions

PB-H-70
L-435 W-110 H-70


AC-HEAT PUMPS/ BRACKETS



Mini bracket



St60



100x100x80



120x120x125

AC- HEAT PUMPS/ BRACKETS




Rubber Foot

Dimensions: 500X130X60



A/C

Dimensions: 450X 450 | 500x450



120x120x125

Dimensions: 900x500x300X2mm

Adjustable Damping Floor Heating Pipe Dispenser



Heat Pump Bracket 600X600



Nails



Rubber Foot

Black

Galvanised

Pcs per pack


100

100

Dimensions

6x8x18

Bracket Elbow

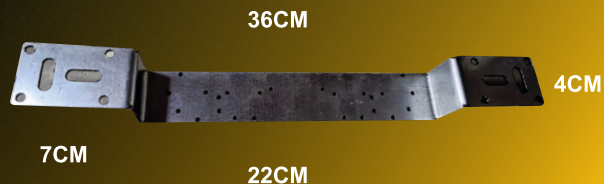

Magnetic Filter



Types

3/4

1"

Plastic box for manifolds




Dimensions

400x400x100

500x400x100

600x400x100


EVA foam tape

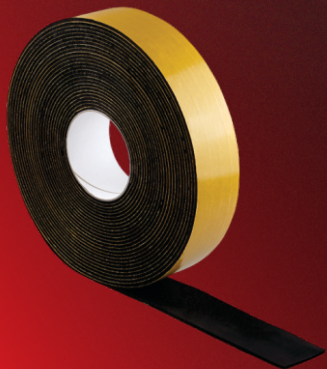

Dimensions

5mm x 15mm x 10m

PVC insulating tape



Aluminium Tape

Dimensions

50mm x 50m 70mm x 50m



Dimensions

0.55mm x 48mm x 15m

Toilet Seat




Toilet Cistern

With Polystyrene
Without Polystyrene



Floor heating manifolds

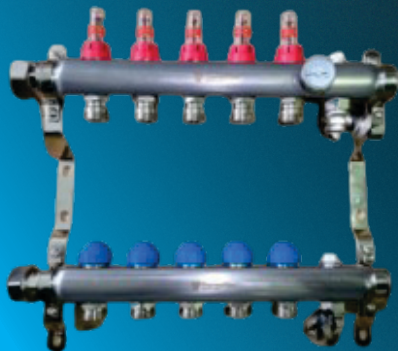

Way

2 - 12

**Compatible with
PE-RT / PERT-AL-PERT
EuroConus adapter**

16 - 17

Actuator Electric Head





Duo Pro

ERP B RoHS CE



Optional :



TECHNICAL DATA

	30L	50L	80L	100L
Rated Capacity	30L	50L	80L	100L
Rated Power	1500W	2000W	2000W	2000W
Rated Voltage	220-240V~	220-240V~	220-240V~	220-240V~
Rated Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Rated Current	6.6A	8.7A	8.7A	8.7A
Rated Pressure	0.8 MPa	0.8 MPa	0.8 MPa	0.8 MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4
Energy Efficiency Class	B	B	B	B
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	28	28	28	28
Net Weight (kg)	17.5	23.3	32	37.8
Gross Weight (kg)	20.6	27.1	36.5	43.1
Product Size (mm)	512x284x590	512x284x825	552x304x1032	552x304x1242
Packing Size (mm)	575x348x688	575x348x923	615x368x1130	615x368x1340
Loading Qty (40HQ)	499	366	266	216



Duo Pro

ERP B RoHS CE



Optional :



TECHNICAL DATA

	30L	50L	80L	100L
Rated Capacity	30L	50L	80L	100L
Rated Power	1500W	2000W	2000W	2000W
Rated Voltage	220-240V~	220-240V~	220-240V~	220-240V~
Rated Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Rated Current	6.6A	8.7A	8.7A	8.7A
Rated Pressure	0.8 MPa	0.8 MPa	0.8 MPa	0.8 MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4
Energy Efficiency Class	B	B	B	B
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	28	28	28	28
Net Weight (kg)	17.5	23.3	32	37.8
Gross Weight (kg)	20.6	27.1	36.5	43.1
Product Size (mm)	512x284x590	512x284x825	552x304x1032	552x304x1242
Packing Size (mm)	575x348x688	575x348x923	615x368x1130	615x368x1340
Loading Qty (40HQ)	499	366	266	216



Duo Eco

ERP B RoHS CE



Vertical & Horizontal Dual Usage



WiFi Control



Electronic Anode



Anti-rust Painting



Blue Crystal Inner Tank



Overall PUF



Earthing Protection



Anti Over-pressure Protection



Water Proof Grade IPX4



Overheat Protection



Anti Dry Heating Protection



TECHNICAL DATA

	30L	50L	80L	100L
Rated Capacity	30L	50L	80L	100L
Rated Power	1800W	1800W	1800W	1800W
Rated Voltage	220-240V~	220-240V~	220-240V~	220-240V~
Rated Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Rated Current	7.8A	7.8A	7.8A	7.8A
Rated Pressure	0.8 MPa	0.8 MPa	0.8 MPa	0.8 MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4
Energy Efficiency Class	B	B	B	B
Hot Water Temp. Limit	80±5°C	80±5°C	80±5°C	80±5°C
Insulation Layer Thickness(mm)	28	28	28	28
Net Weight (kg)	17	22	30.6	36.5
Gross Weight (kg)	19.5	25.3	34.8	41.2
Product Size (mm)	512x284x563	512x284x798	552x304x1005	552x304x1215
Packing Size (mm)	575x348x668	575x348x903	615x368x1110	615x368x1320
Loading Qty (40HQ)	511	384	266	234



Duo

ERP B RoHS CE



Vertical & Horizontal Dual Usage



Anti-rust Painting



Blue Crystal Inner Tank



Overall PUF



Earthing Protection



Anti Over-pressure Protection



Water Proof Grade IPX4



Overheat Protection



Thicker Mg Anode



Anti Dry Heating Protection

Optional :



Dry Heating Element

TECHNICAL DATA

	30L	50L	80L	100L
Rated Capacity	30L	50L	80L	100L
Rated Power	1800W	1800W	1800W	1800W
Rated Voltage	220-240V~	220-240V~	220-240V~	220-240V~
Rated Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Rated Current	7.8A	7.8A	7.8A	7.8A
Rated Pressure	0.8 MPa	0.8 MPa	0.8 MPa	0.8 MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4
Energy Efficiency Class	B	B	B	B
Hot Water Temp. Limit	80±5°C	80±5°C	80±5°C	80±5°C
Insulation Layer Thickness(mm)	28	28	28	28
Net Weight (kg)	17.7	23.2	32.1	37.7
Gross Weight (kg)	19.5	25.3	34.8	41.2
Product Size (mm)	512x284x563	512x284x798	552x304x1005	552x304x1215
Packing Size (mm)	575x348x668	575x348x903	615x368x1110	615x368x1320
Loading Qty (40HQ)	511	384	266	234



Fight pro

ERP RoHS CE REACH



TECHNICAL DATA

	30L	50L	80L	100L
Rated Capacity	30L	50L	80L	100L
Rated Power	1500W	1500W	1500W	1500W
Rated Voltage	220-240V~	220-240V~	220-240V~	220-240V~
Rated Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Rated Current	6.5A	6.5A	6.5A	6.5A
Rated Pressure	0.75 MPa	0.75 MPa	0.75 MPa	0.75 MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4
Energy Efficiency Class	C	C	C	C
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	20	20	20	20
Net Weight (kg)	11	15	20.5	24.2
Gross Weight (kg)	12.6	17	23	27
Product Size (mm)	φ340x599	φ380x722	φ450x777	φ450x917
Packing Size (mm)	375x395x637	415x435x760	485x505x718 (with bottom base)	485x505x938 (with bottom base)
Loading Qty (40HQ)	747	504	349	250





Fight Pro-Plus

ERP RoHS CE REACH



Flex

ERP RoHS CE CB



Optional :



TECHNICAL DATA

	30L	50L	80L	100L
Rated Capacity	30L	50L	80L	100L
Rated Power	2000W	2000W	2000W	2000W
Rated Voltage	220-240V~	220-240V~	220-240V~	220-240V~
Rated Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Rated Current	8.7A	8.7A	8.7A	8.7A
Rated Pressure	0.75 MPa	0.75 MPa	0.75 MPa	0.75 MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4
Energy Efficiency Class	C	C	C	C
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	20	20	20	20
Net Weight (kg)	11	15	20.5	24.2
Gross Weight (kg)	12.6	17	23	27
Product Size (mm)	Φ340x599	Φ380x722	Φ450x777	Φ450x917
Packing Size (mm)	375x395x637	415x435x760	485x505x798 (with bottom base)	485x505x938 (with bottom base)
Loading Qty (40HQ)	747	504	349	250

TECHNICAL DATA

	30L	50L	80L	100L	120L	150L
Rated Capacity	30L	50L	80L	100L	120L	150L
Rated Power	1500W	1500W	1500W	1500W	1500W	1500W
Rated Voltage	220-240V~	220-240V~	220-240V~	220-240V~	220-240V~	220-240V~
Rated Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Rated Current	6.5A	6.5A	6.5A	6.5A	6.5A	6.5A
Rated Pressure	0.75MPa	0.75MPa	0.75MPa	0.75MPa	0.75MPa	0.75MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	25	25	25	25	25	25
Net Weight (kg)	11.5	16	21	24.5	28	35
Gross Weight (kg)	13.5	18.5	24.5	28.5	32	40
Product Size (mm)	Φ350x579	Φ390x726	Φ460x752	Φ460x892	Φ460x1032	Φ460x1242
Packing Size (mm)	410x410x660	465x465x785	545x545x790 (with bottom base)	545x545x930 (with bottom base)	545x545x1070 (with bottom base)	545x545x1280 (with bottom base)
Loading Qty (40HQ)	616	380	256	228	168	168



SASO Series

GCC G-Mark SASO



Thermometer
Display



Temperature
Control Knob



Anti-rust
Painting



Blue Crystal
Inner Tank



Overall
PUF



Earthing
Protection



Anti
Over-pressure
Protection



Water
Proof Grade
IPX4



Overheat
Protection



Anti Dry
Heating
Protection

T E C H N I C A L D A T A

	30L	50L	80L	100L
Rated Capacity	30L	50L	80L	100L
Rated Power	1500W	1500W	1500W	1500W
Rated Voltage	220-240V~	220-240V~	220-240V~	220-240V~
Rated Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Rated Current	6.6A	6.6A	6.6A	6.6A
Rated Pressure	0.7 MPa	0.7 MPa	0.7 MPa	0.7 MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	20	20	20	20
Net Weight (kg)	10.5	16.5	20.5	24.5
Gross Weight (kg)	12.7	19	23.3	27.5
Product Size (mm)	φ340x575	φ450x575	φ450x750	φ450x980
Packing Size (mm)	405x385x637	505x495x625 (with bottom base)	505x495x900 (with bottom base)	505x495x948 (with bottom base)
Loading Qty (40HQ)	678	422	339	240

ME Vertical Series

CB



Optional :



T E C H N I C A L D A T A

	30L	50L	80L	100L	120L	150L
Rated Capacity	30L	50L	80L	100L	120L	150L
Rated Power	1500W	2500W	2500W	2500W	2500W	2500W
Rated Voltage	220V~	220V~	220V~	220V~	220V~	220V~
Rated Frequency	60Hz	60Hz	60Hz	60Hz	60Hz	60Hz
Rated Current	6.8A	11.4A	11.4A	11.4A	11.4A	11.4A
Rated Pressure	0.75MPa	0.75MPa	0.75MPa	0.75MPa	0.75MPa	0.75MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	25	25	25	25	25	25
Net Weight (kg)	11.5	16	21	24.5	28	35
Gross Weight (kg)	13.5	18.5	24.5	28.5	32	40
Product Size (mm)	φ350x579	φ390x726	φ460x752	φ460x892	φ460x1032	φ460x1242
Packing Size (mm)	410x410x660	465x465x785	545x545x930 (with bottom base)	545x545x930 (with bottom base)	545x545x1070 (with bottom base)	545x545x1280 (with bottom base)
Loading Qty (40HQ)	616	380	256	228	168	168

ME Horizontal Series

CB



T E C H N I C A L D A T A

	30L	50L	80L	100L	120L	150L
Rated Capacity	30L	50L	80L	100L	120L	150L
Rated Power	1500W	2500W	2500W	2500W	2500W	2500W
Rated Voltage	220V~	220V~	220V~	220V~	220V~	220V~
Rated Frequency	60Hz	60Hz	60Hz	60Hz	60Hz	60Hz
Rated Current	6.8A	11.4A	11.4A	11.4A	11.4A	11.4A
Rated Pressure	0.75MPa	0.75MPa	0.75MPa	0.75MPa	0.75MPa	0.75MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	25	25	25	25	25	25
Net Weight (kg)	12	16.5	23.5	27.5	29.5	36
Gross Weight (kg)	14	19	27	31.5	33.5	41
Product Size (mm)	φ350x625	φ390x773	φ460x846	φ460x996	φ460x1106	φ460x1316
Packing Size (mm)	410x410x710	465x465x840	545x545x903 (with bottom base)	545x545x1053 (with bottom base)	545x545x1163 (with bottom base)	545x545x1373 (with bottom base)
Loading Qty (40HQ)	538	359	236	176	168	150



Floor Standing

CB



Temperature Control Knob



Anti-rust Painting



Blue Crystal Inner Tank



Overall PUF



Earthing Protection



Anti Over-pressure Protection



Water Proof Grade IPX4



Overheat Protection



Thicker Mg Anode



Anti Dry Heating Protection

TECHNICAL DATA

	50L	80L	100L	120L	150L
Rated Capacity	50L	80L	100L	120L	150L
Rated Power	1500W	1500W	3000W	3000W	3000W
Rated Voltage	220-240V~	220-240V~	220-240V~	220-240V~	220-240V~
Rated Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Rated Current	6.6A	6.6A	13.1A	13.1A	13.1A
Rated Pressure	0.75MPa	0.75MPa	0.75MPa	0.75MPa	0.75MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4	IPX4
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	30	30	30	30	30
Net Weight (kg)	19.7	24.5	28.5	32.3	38.9
Gross Weight (kg)	22.7	28	31.9	36.3	43.2
Product Size (mm)	φ470x593	φ470x768	φ470x905	φ470x1050	φ470x1262
Packing Size (mm)	545x585x695 (with bottom base)	545x585x870 (with bottom base)	545x585x1007 (with bottom base)	545x585x1147 (with bottom base)	545x585x1357 (with bottom base)
Loading Qty (40HQ)	298	239	210	166	149



Buffer Tank Series



Anti-rust Plating



Blue Crystal Inner Tank



Thicker Mg Anode



Overall PUF



Earthing Protection



Anti Over-pressure Protection



Water Proof Grade IPX4



Overheat Protection



Anti Dry Heating Protection

T E C H N I C A L D A T A

Rated Capacity	25L	50L
Rated Power	3600W	3600W
Rated Voltage	220-240V~	220-240V~
Rated Frequency	50-60Hz	50-60Hz
Rated Current	15.6A	15.6A
Rated Pressure	1400kPa	1400kPa
Rank Water Proof	IPX4	IPX4
Hot Water Temp. Limit	75°C	75°C
Insulation Layer Thickness(mm)	30	
Net Weight (kg)	17	23
Gross Weight (kg)	19	25.5
Product Size (mm)	φ400x460	φ400x695
Packing Size (mm)	435x435x505	435x435x740
Loading Qty (40HQ)	708	480



VEA

UL FCC



TECHNICAL DATA

	2.5gallons	4gallons	8gallons
Rated Capacity	2.5gallons	4gallons	8gallons
Rated Power	1440W	1440W	1440W
Rated Voltage	120V~	120V~	120V~
Rated Frequency	60Hz	60Hz	60Hz
Rated Current	12A	12A	12A
Rated Pressure	150psi	150psi	150psi
Rank Water Proof	IPX4	IPX4	IPX4
Hot Water Temp. Limit	55-145°F	55-145°F	55-145°F
Insulation Layer Thickness(mm)	20	20	20
Net Weight (kg)	8	9.6	12.8
Gross Weight (kg)	9.2	11	14.7
Product Size (mm)	340x340x290	380x380x325	440x440x390
Packing Size (mm)	400x390x350	440x430x385	500x490x445
Loading Qty (40HQ)	1259	900	605



VRM

ERP RoHS CE CB



TECHNICAL DATA

	10L	15L	30L
Rated Capacity	10L	15L	30L
Rated Power	1500W	1500W	2500W
Rated Voltage	220V~	220V~	220V~
Rated Frequency	60Hz	60Hz	60Hz
Rated Current	6.8A	6.8A	11.4A
Rated Pressure	0.75 MPa	0.75MPa	0.75MPa
Rank Water Proof	IPX4	IPX4	IPX4
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	20	20	20
Net Weight (kg)	6.7	8	12.2
Gross Weight (kg)	8.4	9.8	14.2
Product Size (mm)	340x340x290	380x380x325	440x440x390
Packing Size (mm)	400x390x350	440x430x385	500x490x445
Loading Qty (40HQ)	1259	900	605



Multi Connection Series

CB

Thermometer
Display

Temperature
Control Knob

Anti-rust
Painting

Blue Crystal
Inner Tank

Overall
Pull

Earthing
Protection

Anti
Over-pressure
Protection

IPX4
Water
Proof Grade
IPX4

Overheat
Protection

Thicker
Mg Anode

Anti Dry
Heating
Protection

Optional :

Dry Heating
Element

Parameter

	80L	100L	120L	150L
Rated Capacity	80L	100L	120L	150L
Rated Power	1500W	3000W	3000W	3000W
Rated Voltage	220-240V~	220-240V~	220-240V~	220-240V~
Rated Frequency	50Hz	50Hz	50Hz	50Hz
Rated Current	6.5A	6.5A	6.5A	6.5A
Rated Pressure	0.75MPa	0.75MPa	0.75MPa	0.75MPa
Rank Water Proof	IPX4	IPX4	IPX4	IPX4
Hot Water Temp. Limit	75±5°C	75±5°C	75±5°C	75±5°C
Insulation Layer Thickness(mm)	25	25	25	25
Net Weight (kg)	30.5	32.2	35.7	42.7
Gross Weight (kg)	33.9	36.2	39.7	47.7
Product Size (mm)	φ470x810	φ460x892	φ460x1032	φ460x1242
Packing Size (mm)	545x545x848 (with bottom base)	545x545x930 (with bottom base)	545x545x1070 (with bottom base)	545x545x1280 (with bottom base)
Loading Qty (40HQ)	252	228	168	168



D58-P28



ECO



Instant heating



Sufficient water flows



leakage protection



Constant warming



D58-P55



ECO



Instant heating



Sufficient water flows



leakage protection



Constant warming

TECHNICAL DATA

Model Name	D58-P28 (Water pump 28W)
Product Type	Instant electric water heater
Heating Time	3-5s
Rated Voltage	220-240V~
Rated Frequency	50-60Hz
Rated Power	3.5 - 4.5 - 5.5 KW
Rated Water Pressure	0 MPa
Heating Tube	Stainless Steel
Body Material	ABS
Power Cord Length	0.8M
Certification	CE
Product Size (mm)	250 x 420 x 75

TECHNICAL DATA

Model Name	D55-P55 (Water pump 55W)
Product Type	Instant electric water heater
Heating Time	3-5s
Rated Voltage	220-240V~
Rated Frequency	50-60Hz
Rated Power	3.5 - 4.5 - 5.5 KW
Rated Water Pressure	0 MPa
Heating Tube	Stainless Steel
Body Material	ABS
Power Cord Length	0.8M
Certification	CE
Product Size (mm)	250 x 420 x 75



+49 1523 847 34 18



www.thermofloor-agg.de



info@thermofloor-agg.de